

# ACFM<sup>®</sup> PROBE CATALOG



# CONTENTS

## TOPSIDE ACFM PROBES

Introduction to Sensu 2 Topside Probes .....	5
SENSU 2 Compliant Array Probe .....	6
SENSU 2 Weld Probe .....	7
SENSU 2 Mini Pencil Probe .....	8
SENSU Pencil Probe .....	9

## UNDERWATER ACFM PROBES

Introduction to Sensu 2 UW Probes .....	10
SENSU 2 Diver Mini Array probe .....	11
SENSU 2 Weld Probe .....	12
SENSU 2 Diver Ground Weld Probe .....	13
SENSU 2 Tight Access Probe .....	14
SENSU 2 Mini Pencil Probes .....	15
SENSU 2 Micro Pencil Probes .....	16

## ACFM PROBES COMPARISON

ACFM Probe List .....	17
-----------------------	----

## OVERVIEW

Eddyfi Technologies offers a wide range of Alternating Current Field Measurement (ACFM®) probes for the detection and sizing of surface breaking cracks in a range of metals. These include simple single-sensor probes through to advanced multi-sensor arrays to suit all purposes, sizes, angles and underwater plus a customised option, meaning that TSC can supply the right equipment needed for your particular inspection project.

Our standard frequency probes have been developed to optimise performance on carbon steel components and welds. This probe range also includes high frequency versions of many of our standard probes, which are used for inspecting non-magnetic materials.

Our range of probes can be used in a variety of situations, from site inspection undertaken by abseilers, to thread inspection in workshops.

The ACFM® method can utilise a variety of different probe types, which are selected according to the application. When selecting a probe, consideration should be given to material type, access and geometry, weld quality, productivity, temperature and minimum detectable defect size.

## MATERIAL TYPE

ACFM® can be used on most conductive metallic components for the detection of surface breaking defects, either on plain metal or through coating such as paint, epoxy or metallic coatings. Whilst it excels at the detection and sizing of cracks in and around welded ferrous components, it can also be used for the detection of environmental cracking in plain sections, pressure vessels, pipework and for inspecting non-magnetic metals.

The type of material to be inspected is a key factor in the selection of an ACFM probe:

- Ferritic Carbon Steels should normally be inspected using probes with a 5kHz operating frequency.
- Austenitic Steels, aluminium, titanium and other non-magnetic materials should normally be inspected using probes with a 50kHz operating frequency.

Many ACFM probes are available in either 5kHz or 50kHz variants to suit the component material.

## GEOMETRY AND ACCESS

ACFM probes are available in several common body styles to allow the probe access for a variety of common geometries and components.

Where a butt-weld, lap-weld or plain section are to be inspected, multi-element array probes can be used to cover large areas swiftly for maximum productivity. Details of some common types are contained in this document.

The Weld probes are designed primarily for scanning along weld toes but can also be used to inspect for defects in general components. The Weld probe type should be used wherever access allows because it is the most stable probe to deploy and has the largest field inducer, making it best for accurate sizing, particularly on deep defects.

The Pencil probes are used in places that the Weld probe cannot gain access and are particularly useful at plate edges where their smaller induction fields produce less of a geometry effect. Pencil probes are available with three different nose orientations. The nose orientation should be chosen depending on the access requirement.

Probes are also available for deployment underwater. These are available either with a 5m cable and connectors for a TSC U41D/DA instrument or with a 50m long cable with a connector for use with TSC AMIGO2.

The TSC AMIGO2 probes are designed for use in shallow water applications where the AMIGO 2 Instrument remains dry and the long probe cable is used to deploy the probes underwater.

For greater depth, the U41D/DA probes are rated for 300m operation.

NOTE: Only probes specified as underwater probes can be used for this type of inspection.

## SENSITIVITY

SENSU 2 ACFM probes, combined with the latest generation ACFM instrumentation, provide higher signal to noise ratios and better sensitivity than previous generations of ACFM probes. Laboratory test have demonstrated SENSU 2 ACFM probes can detect cracks 5mm long x 0.5mm deep and above on a good surface.

With this increase in performance, standard ACFM probes are generally recommended for most applications, even where micro probes were used previously. However, SENSU 2 probes with smaller, micro noses are still available for the applications where the ultimate in ACFM sensitivity is still required.

## STANDARD ACFM® PROBES


- Feature a pair of Bx and Bz sensors wound concentrically.
- Generally have a sensitive width of 15mm, centred on the scan line, and are relatively insensitive to small liftoff variations and small variations in weld profile, spatter etc.

## MICRO PROBES


- Used for applications where the highest sensitivity is required, micro probes are available in the three pencil probe configurations.
- Contain smaller, side by side sensors which provide improved detection for very short and shallow defects. However, this can create skewed butterfly loops with short defects.
- Have a typical sensitive width of 10mm and are generally more susceptible to noise generated by small liftoff variations and variations in weld profile, spatter etc compared to their standard Pencil probe counterparts. Because of this, Micro Pencil probes should only be used where the surface is smooth and the additional sensitivity is required.

## UNDERSTANDING PART NUMBERS

### Standard Probes

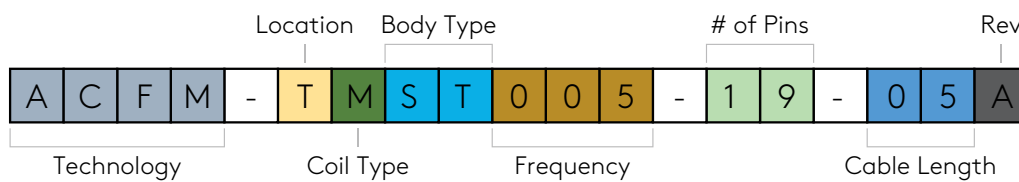

### Array Probes

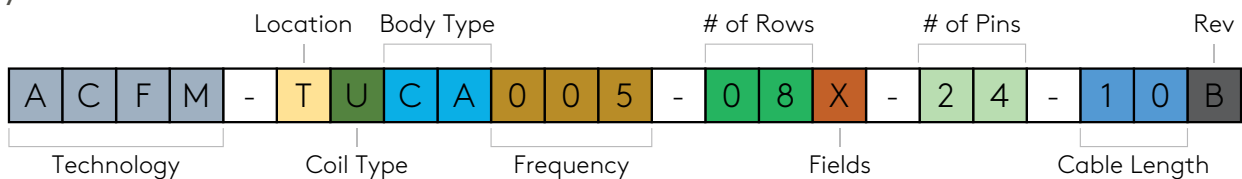

# INTRODUCTION

## SENSU 2 TOPSIDE PROBES

TSC's functional design philosophy continues in the new and innovative ACFM® probe range SENSU 2, which partners TSC Amigo2 to enable much faster inspections, pristine signals, and higher SNR.

As "intelligent" probes, the SENSU 2 range stores configuration information, features convenient buttons and provides instant feedback of scanning status whilst in use.

- Faster than the legacy probes - up to 8 outputs
- Connectorized for convenience. Easy to swap probe cables
- IP65 rated
- All probe data stored in probe's memory.
- Buttons to start or stop a scan
- LEDs to indicate scan status
- Ergonomic design



# SENSU 2 COMPLIANT ARRAY PROBE

## COMPATIBLE WITH AMIGO 2

### OVERVIEW


Designed to inspect ferromagnetic steel, this 5kHz probe has 8 or 16 spring loaded modules containing Bx, By and Bz coils pair that comply to a profile. Each module can travel independently through a distance of approximately 12mm (0.47"). This makes the probe ideal for inspecting butt or lap welds with raised profile weld caps since, depending on the cap width, the probe can inspect both toes and the full cap in one pass as it scans a strip approximately 45/90mm wide.

The probe also features a wheeled encoder, for position feedback and rapid sizing of defects in any orientation, on-board start/stop and mark buttons.

- Dual fields
- Integrated encoder
- Integrated buttons
- Max cable length: 50m
- Coverage: 45 or 90mm

#### Compatible cables

- SENSU-2-HS-CBL-5M
- SENSU-2-HS-CBL-20M
- SENSU-2-HS-CBL-50M

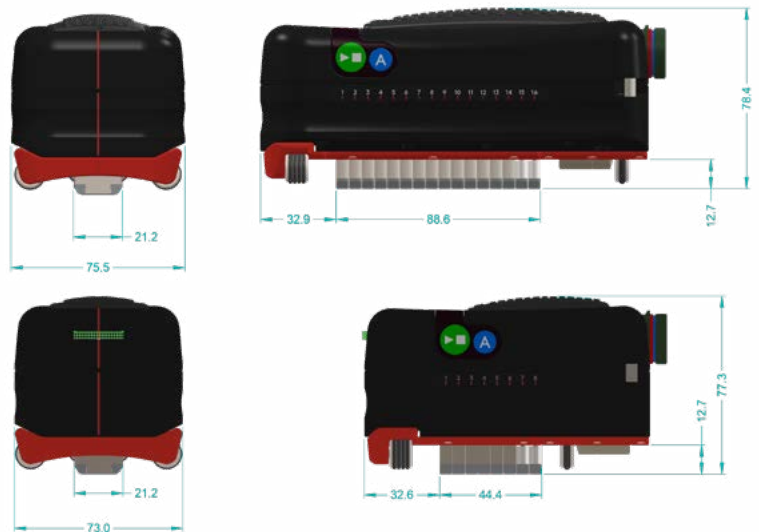

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-TUCA005-16T-40	SENSU 2	Compliant array probe, 16 rows	5kHz	Micro	90	414
ACFM-TUCA005-08T-40A	SENSU 2	Compliant array probe, 8 rows	5kHz	Micro	45	414

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2	Butt and lap weld inspection. Plain areas on flat or curved components.	Compliant profile, ideal for raised weld caps. Scan strip up to approx 45mm or 90mm wide.

# SENSU 2 WELD PROBE

## COMPATIBLE WITH AMIGO 2


### OVERVIEW

The probe of choice for generic ferritic or austenitic weld inspection.

Features stabilizers and a wider field. The wider field enables deeper sizing down to 25mm deep.

Available for the inspection of

- Ferritic Welds (5kHz)
- Austenitic Welds(50kHz)

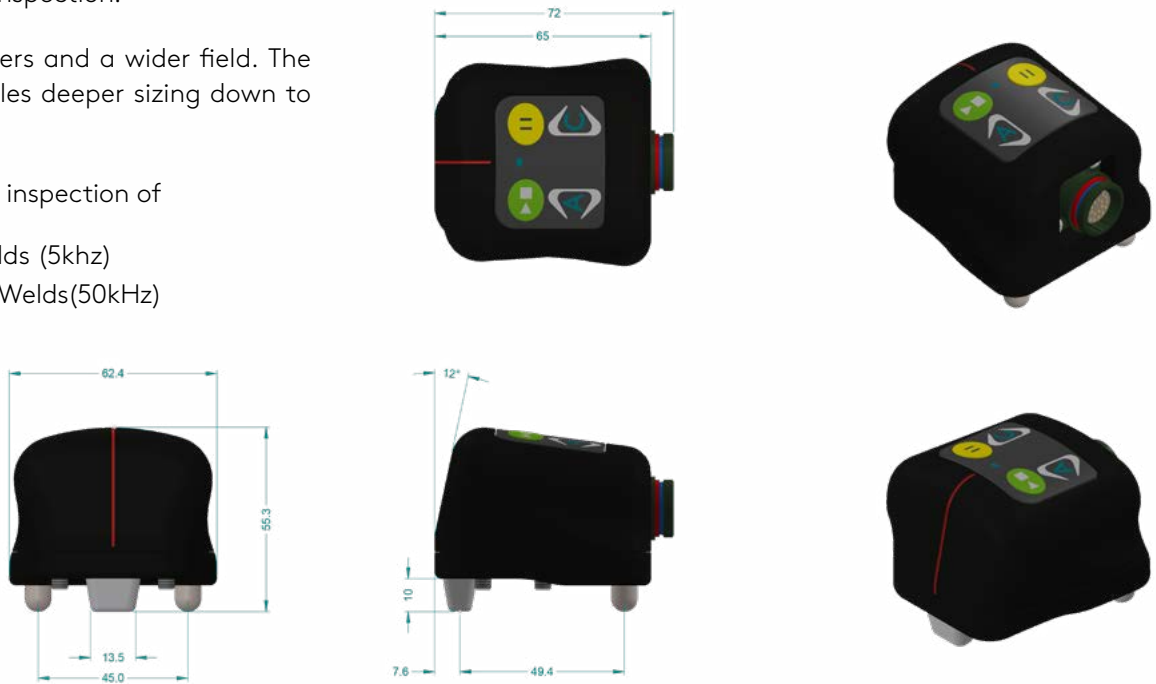

Compatible cables

- SENSU-2-HS-CBL-5M
- SENSU-2-HS-CBL-20M
- SENSU-2-HS-CBL-50M

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-TMWP005-22A	SENSU 2	Topside weld probe	5kHz		15	N/A
ACFM-TMWP050-22A	SENSU 2	Topside weld probe	50kHz		15	N/A

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2	Butt and lap weld inspection. Sizing in thick wall components	Stabilizers Wider field Coverage of 15mm.

# TOPSIDE ACFM PROBES

## SENSU 2 MINI PENCIL PROBE

### COMPATIBLE WITH AMIGO 2

#### OVERVIEW

The **Mini-Pencil** probe range maintains the sensitivity of the standard Weld Probes, but have the advantage of being able to access restricted areas and areas of weld associated with rat holes in structures.

They are less prone to signal variations near plate edges, but are less accurate for depth sizing deep defects (>10mm).

The right angle nose type is ideal for inspecting through rat-holes, or for longitudinal cracks inside pipes.

The straight nose probe is ideal for difficult access areas while the transverse nose is ideal for circumferential cracks inside pipes.

Compatible cables

- SENSU-2-HS-CBL-5M
- SENSU-2-HS-CBL-20M
- SENSU-2-HS-CBL-50M



Nose Configuration options:



PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-TMRA005-22	SENSU 2	Right-Angled Pencil probe	5kHz	Mini - RA	15	251
ACFM-TMST005-22	SENSU 2	Straight Pencil probe	5kHz	Mini - Straight	15	250
ACFM-TMTR005-22	SENSU 2	Transverse Pencil probe	5kHz	Mini - Transverse	15	252
ACFM-TMRA050-22	SENSU 2	Right-Angled Pencil probe	50kHz	Mini - RA	15	N/A
ACFM-TMST050-22	SENSU 2	Straight Pencil probe	50kHz	Mini - Straight	15	N/A
ACFM-TMTR050-22	SENSU 2	Transverse Pencil probe	50kHz	Mini - Transverse	15	N/A

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2	Restricted Area Weld Inspection. Rat Holes, Plate Edges, Longitudinal Cracks. Circumferential Cracks.	Eases inspection access in restricted areas.



# TOPSIDE ACFM PROBES

## SENSU™ PENCIL PROBE


### COMPATIBLE WITH PACE

#### OVERVIEW

These Pencil style ACFM® probes, with a straight nose and right angle nose, have been designed to perform easy, continuous scanning whilst being able to gain access to challenging tight angle inspection areas.

The right angle nose type is ideal for inspecting through rat-holes, or for longitudinal cracks inside pipes.

The straight nose probe is ideal for difficult access areas while the transverse nose is ideal for circumferential cracks inside pipes.

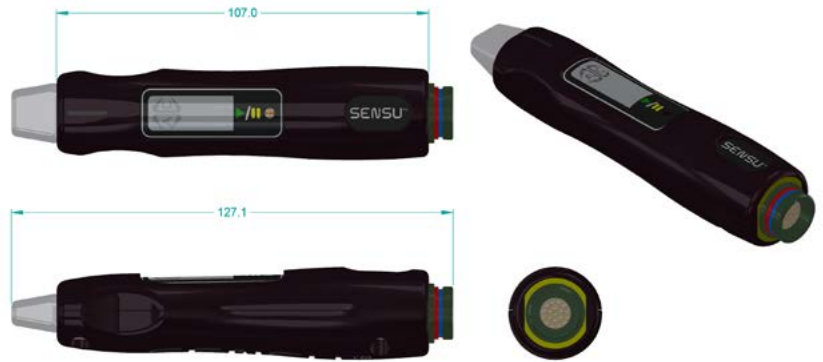

Available for the inspection of

- Ferritic Welds (5khz)
- Austenitic Welds(50kHz)

Nose Configuration options:



Compatible cables

- ACFM-SENSU-CABLE-1\_5M
- ACFM-SENSU-CABLE-5M
- ACFM-SENSU-CABLE-15M

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-SENSU-618-5KHZ	SENSU	Straight Pencil probe	5kHz	Mini - Straight	15	
ACFM-SENSU-619-5KHZ	SENSU	Right-Angled Pencil probe	5kHz	Mini - RA	15	
ACFM-SENSU-620-5KHZ	SENSU	Transverse Pencil probe	5kHz	Mini - Transverse	15	
ACFM-SENSU-624-50KHZ	SENSU	Straight Pencil probe	50kHz	Mini - Straight	15	
ACFM-SENSU-625-50KHZ	SENSU	Right-Angled Pencil probe	50kHz	Mini - RA	15	
ACFM-SENSU-626-50KHZ	SENSU	Transverse Pencil probe	50kHz	Mini - Transverse	15	

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, PACE	Through Coating. Ideal for single operators Rope access, bridges, topside welds	Ergonomic design for easy continuous hand held scanning. Hot swappable. LED indicator for function status.

# INTRODUCTION

## SENSU 2 UNDERWATER ACFM PROBES

### COMPATIBLE WITH AMIGO 2 AND U41

TSC's functional design philosophy continues in the new and innovative ACFM® probe range SENSU 2, which partners TSC Amigo2 and TSC U41 to enable much faster inspections, pristine signals, and higher SNR.

As "intelligent" probes, the SENSU™2 range stores configuration information onboard in the probe electronics.

- Faster than the previous legacy probes – 2 outputs
- Rated IP68 down to 300m underwater
- All probe data stored in the probe's memory.
- Familiar probe bodies with updated electronics, cables and connectors
- Integrated cable options:
  - U41 compatible, watertight connector, 5m long
  - Amigo 2 compatible, topside connector, 50m long



# SENSU 2 DIVER MINI ARRAY PROBE


## COMPATIBLE WITH AMIGO 2 AND U41

### OVERVIEW


Flat, wide coverage array probe for ferritic welds; X field only

4 ACFM rows


Coverage: 36mm

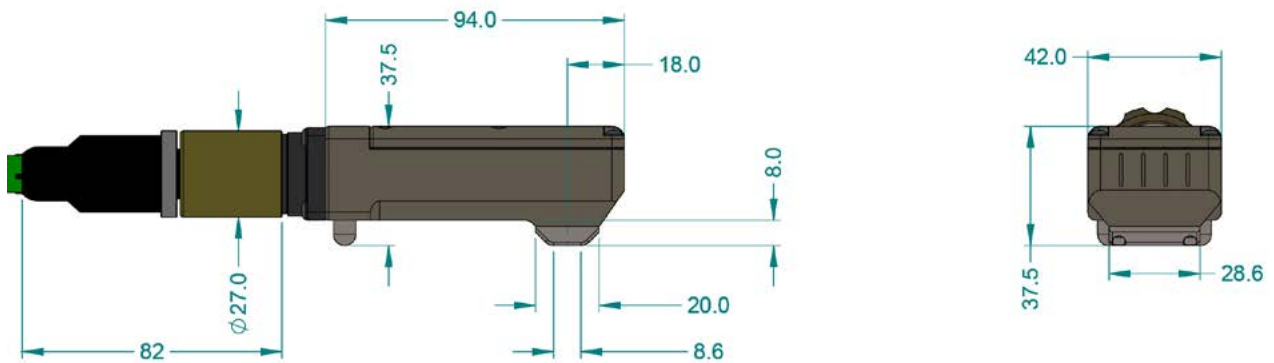

Amigo 2 50m cable

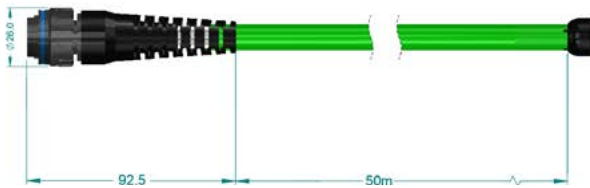

U41 5m cable

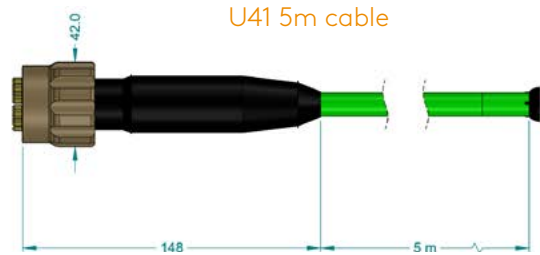

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UMLP005-04X-40-50	SENSU 2	UW Diver Mini Array probe (Amigo 2)	5kHz	Mini	36	N/A
ACFM-UMLP005-04X-21-05	SENSU 2	UW Diver Mini Array probe (U41)	5kHz	Mini	36	N/A

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, U41D	Subsea welds including butt, fillet and nodal joints	Increase coverage and speed of inspection. The broader scan coverage allows for a margin of error while positioning the probe, making it easier for the operator.

# UNDERWATER ACFM PROBES

## SENSU 2 WELD PROBE (UW)

### COMPATIBLE WITH AMIGO 2 AND U41


#### OVERVIEW

The probe of choice for generic ferritic or austenitic weld inspection.


Designed for subsea inspection of welds, plate and tubulars.

The probe electronics are encapsulated in an in-line bottle in the cable about 30cm from the probe body.


Features stabilizers and a wider field. The wider field enables deeper sizing down to 25mm deep.

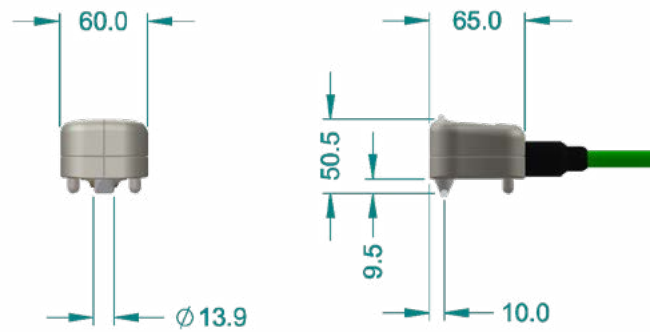

Amigo 2 50m cable

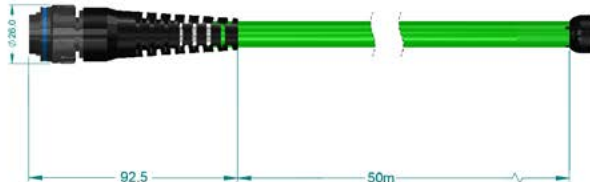

U41 5m cable

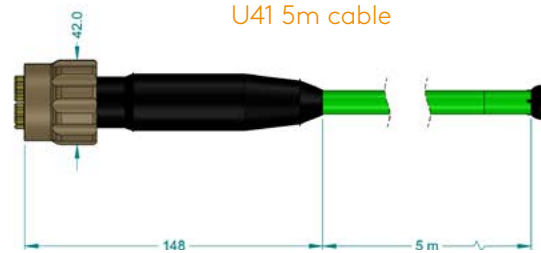

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UMWP005-40-50	SENSU 2	UW Weld probe, Amigo 2, 50m cable	5kHz	Mini	15	293A
ACFM-UMWP050-40-50	SENSU 2	UW HF Weld probe., Amigo 2, 50m cable	50kHz	Mini	15	558A
ACFM-UMWP005-21-05	SENSU 2	UW Weld probe, U41, 5m cable	5kHz	Mini	15	293
ACFM-UMWP050-21-05	SENSU 2	UW HF Weld probe, U41, 5m cable	50kHz	Mini	15	558


COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, U41D	Welds, Plates, Tubulars, Through Coating Inspection, Splash zone inspections.	Stabilizers Wider field Coverage of 15mm.

# SENSU 2 DIVER GROUND WELD PROBE


## COMPATIBLE WITH AMIGO 2 AND U41

### OVERVIEW


The Ground Weld probe is designed with a long slender nose to fit into a weld repair grind to inspect for new or residual cracking within the grind.

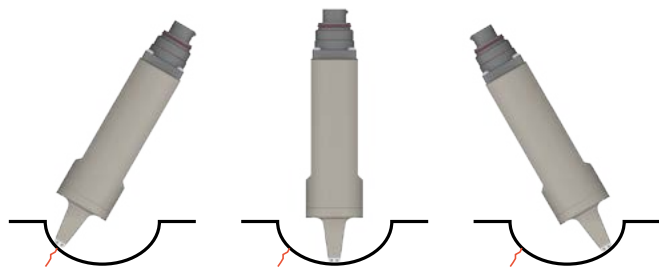

Amigo 2 50m cable

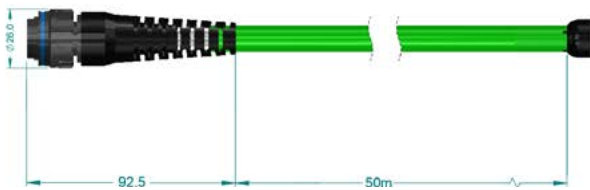

U41 5m cable

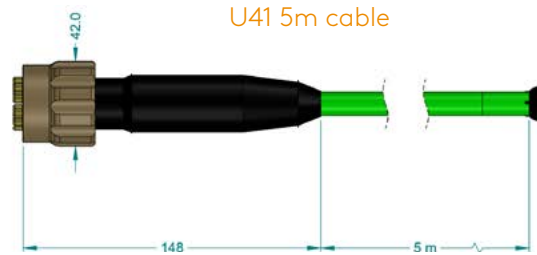

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UMGW005-40-50	SENSU 2	UW Ground Weld probe (Amigo 2)	5kHz	Mini	15	303A
ACFM-UMGW005-21-05	SENSU 2	UW Ground Weld probe (U41)	5kHz	Mini	15	303

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, U41D	Weld repair grind inspection, long nose.	Better reach into grounded welds. Enables surer weld repair through continuous monitoring throughout the repair process


# SENSU 2 TIGHT ACCESS PROBE (UW)

## COMPATIBLE WITH AMIGO 2 AND U41

### OVERVIEW

The Tight Access probe is designed for subsea inspection of tubular welded connections where the chord to brace angle prevents the use of the standard weld probe.

NOTE: The probe relies on the tight geometry for efficient coupling of the input field and so should only be used in these situations.

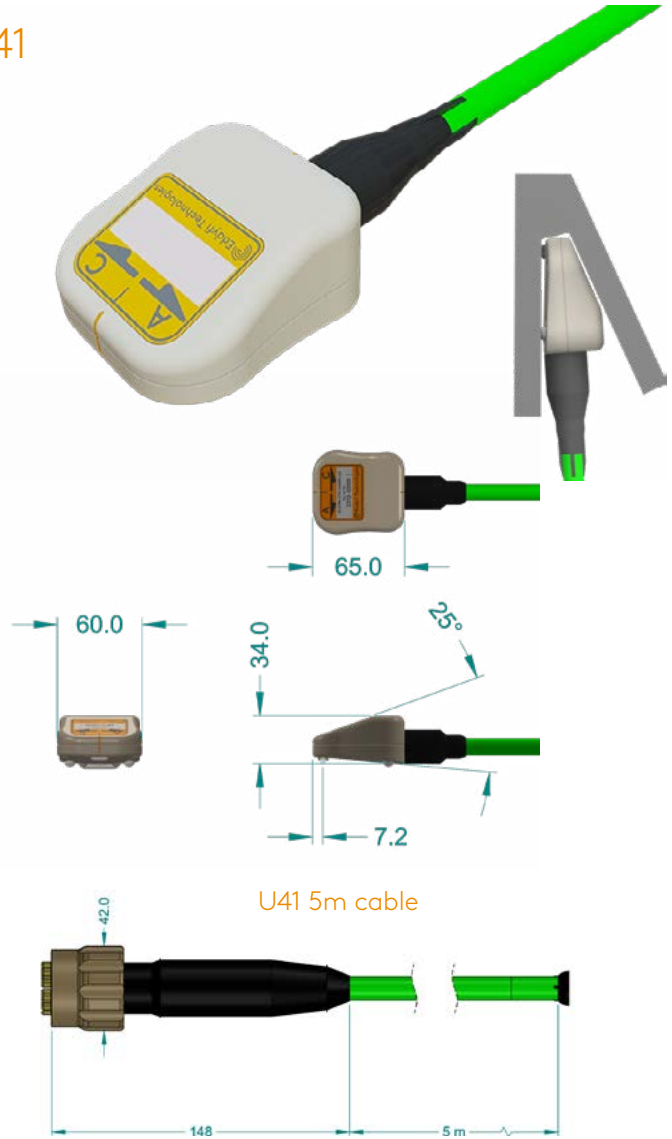

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UMTA005-40-50	SENSU 2	UW Tight Access probe, Amigo 2, 50m cable	5kHz	Mini	15	307A
ACFM-UMTA050-40-50	SENSU 2	UW HF Tight Access probe, Amigo 2, 50m	50kHz	Mini	15	312A
ACFM-UMTA005-21-05	SENSU 2	UW Tight Access probe, U41, 5m cable	5kHz	Mini	15	307
ACFM-UMTA050-21-05	SENSU 2	UW HF Tight Access probe, U41, 5m cable	50kHz	Mini	15	312

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, U41D	Tubular welded connections, tight geometry.	Easier inspection of narrow geometries and restricted areas.

## SENSU 2 MINI PENCIL PROBES (UW)



### COMPATIBLE WITH AMIGO 2 AND U41

#### OVERVIEW

The Mini Pencil probe maintains the sensitivity of the normal Weld probes but have the advantage of being able to access restricted areas and areas of weld associated with rat holes or plate edges in structures.

Available nose configurations include straight, right angle, transverse.

Nose Configuration options:

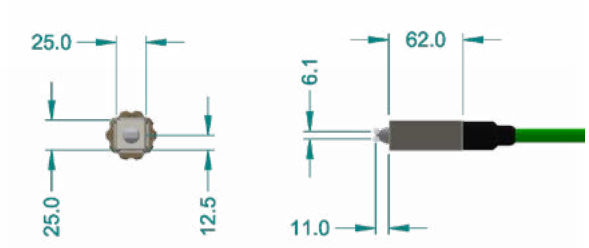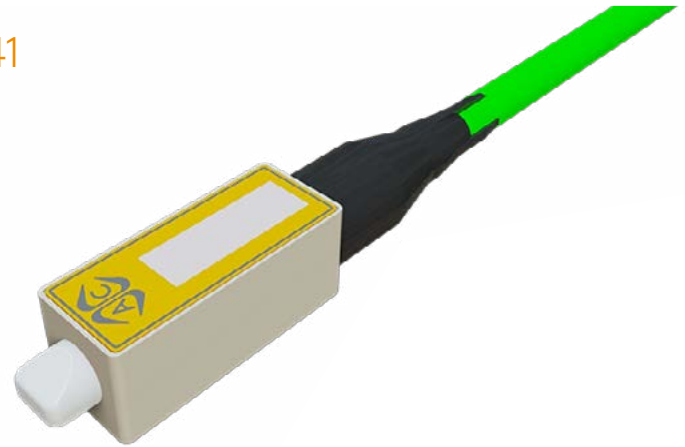

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UMRA005-40-50	SENSU 2	UW Right-Angled Mini Pencil, Amigo 2, 50m	5kHz	Mini - RA	15	337A
ACFM-UMST005-40-50	SENSU 2	UW Straight Mini Pencil, Amigo 2, 50m	5kHz	Mini - Straight	15	336A
ACFM-UMTR005-40-50	SENSU 2	UW Transverse Mini Pencil, Amigo 2, 50m	5kHz	Mini - Transverse	15	352A
ACFM-UMRA050-40-50	SENSU 2	UW HF Right-Angled Mini Pencil, Amigo 2, 50m	50kHz	Mini - RA	15	
ACFM-UMST050-40-50	SENSU 2	UW HF Straight Mini Pencil, Amigo 2, 50m	50kHz	Mini - Straight	15	307A
ACFM-UMTR050-40-50	SENSU 2	UW HF Transverse Mini Pencil, Amigo 2, 50m	50kHz	Mini - Transverse	15	
ACFM-UMRA005-21-05	SENSU 2	UW Right-Angled Mini Pencil, U41, 5m	5kHz	Mini - RA	15	337
ACFM-UMST005-21-05	SENSU 2	UW Straight Mini Pencil, U41, 5m	5kHz	Mini - Straight	15	336
ACFM-UMTR005-21-05	SENSU 2	UW Transverse Mini Pencil, U41, 5m	5kHz	Mini - Transverse	15	352
ACFM-UMRA050-21-05	SENSU 2	UW HF Right-Angled Mini Pencil, U41, 5m	50kHz	Mini - RA	15	
ACFM-UMST050-21-05	SENSU 2	UW HF Straight Mini Pencil, U41, 5m	50kHz	Mini - Straight	15	307
ACFM-UMTR050-21-05	SENSU 2	UW HF Transverse Mini Pencil, U41, 5m	50kHz	Mini - Transverse	15	

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2, U41D	Restricted areas, rat holes, plate edges.	Eases inspection access in restricted areas in splash zone, shallow depth, diver deployed.


## SENSU 2 MICRO PENCIL PROBES (UW)

COMPATIBLE WITH AMIGO 2 AND U41

### OVERVIEW

The Micro Pencil probes are similar to the Mini Pencil probes but are manufactured with high sensitivity coils for the detection and measurement of shallow defects, less than 1mm deep.

Designed for specialist applications where more sensitivity is required, but inspection surfaces need to be cleaner.

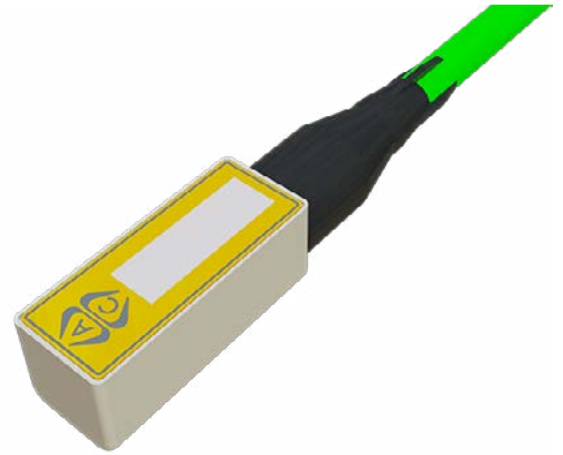


Nose Configuration options:

Transverse

Right Angled

Straight

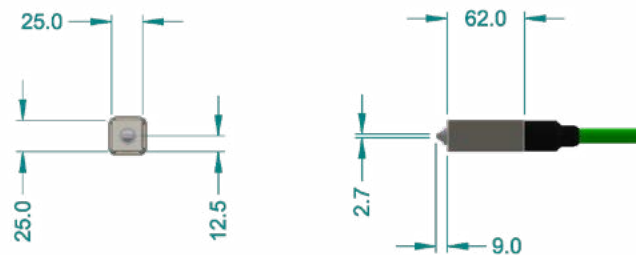

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	LEGACY
ACFM-UURA005-21-05	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	5kHz	Micro - RA	10	354A
ACFM-UUST005-21-05	SENSU 2	UW Straight Micro Nosed Pencil probe	5kHz	Micro - Straight	10	353A
ACFM-UUTR005-21-05	SENSU 2	UW Transverse Micro Nosed Pencil probe	5kHz	Micro - Transverse	10	355A
ACFM-UURA050-21-05	SENSU 2	UW HF Right-Angled Micro Nosed Pencil probe	50kHz	Micro - RA	10	
ACFM-UUST050-21-05	SENSU 2	UW HF Straight Micro Nosed Pencil probe	50kHz	Micro - Straight	10	
ACFM-UUTR050-21-05	SENSU 2	UW HF Transverse Micro Nosed Pencil probe	50kHz	Micro - Transverse	10	
ACFM-UURA005-40-50	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	5kHz	Micro - RA	10	354
ACFM-UUST005-40-50	SENSU 2	UW Straight Micro Nosed Pencil probe	5kHz	Micro - Straight	10	353
ACFM-UUTR005-40-50	SENSU 2	UW Transverse Micro Nosed Pencil probe	5kHz	Micro - Transverse	10	355
ACFM-UURA050-40-50	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	50kHz	Micro - RA	10	
ACFM-UUST050-40-50	SENSU 2	UW Straight Micro Nosed Pencil probe	50kHz	Micro - Straight	10	
ACFM-UUTR050-40-50	SENSU 2	UW Transverse Micro Nosed Pencil probe	50kHz	Micro - Transverse	10	

COMPATIBLE WITH	APPLICATIONS	THE BENEFITS
AMIGO 2 & U41D	High sensitivity for shallow defects (<1mm)	Eases inspection access in restricted areas.



# ACFM PROBE LIST

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	AMIGO2	PACE	U41	LEGACY
ACFM-TUCA005-16T-40	SENSU 2	Compliant array	5kHz	Micro	90	Y	N	N	
ACFM-TUCA005-08T-40A	SENSU 2	Compliant array	5kHz	Micro	45	Y	N	N	414
ACFM-TMWP005-22A	SENSU 2	Topside weld probe	5kHz		15	Y	N	N	
ACFM-TMWP050-22A	SENSU 2	Topside weld probe	50kHz		15	Y	N	N	
ACFM-TMRA005-22	SENSU 2	Right-Angled Pencil	5kHz	Mini - RA	15	Y	N	N	251
ACFM-TMST005-22	SENSU 2	Straight Pencil	5kHz	Mini - Straight	15	Y	N	N	250
ACFM-TMTR005-22	SENSU 2	Transverse Pencil	5kHz	Mini - Transverse	15	Y	N	N	252
ACFM-TMRA050-22	SENSU 2	Right-Angled Pencil	50kHz	Mini - RA	15	Y	N	N	
ACFM-TMST050-22	SENSU 2	Straight Pencil	50kHz	Mini - Straight	15	Y	N	N	
ACFM-TMTR050-22	SENSU 2	Transverse Pencil	50kHz	Mini - Transverse	15	Y	N	N	
ACFM-SENSU-618-5KHZ	SENSU	Straight Pencil	5kHz	Mini - Straight	15	Y	Y	N	
ACFM-SENSU-619-5KHZ	SENSU	Right-Angled Pencil	5kHz	Mini - RA	15	Y	Y	N	
ACFM-SENSU-620-5KHZ	SENSU	Transverse Pencil	5kHz	Mini - Transverse	15	Y	Y	N	
ACFM-SENSU-624-50KHZ	SENSU	Straight Pencil	50kHz	Mini - Straight	15	Y	Y	N	
ACFM-SENSU-625-50KHZ	SENSU	Right-Angled Pencil	50kHz	Mini - RA	15	Y	Y	N	
ACFM-SENSU-626-50KHZ	SENSU	Transverse Pencil	50kHz	Mini - Transverse	15	Y	Y	N	
ACFM-UMLP005-04X-40-50	SENSU 2	UW Diver Mini Array	5kHz	Mini	36	Y	N	N	
ACFM-UMLP005-04X-21-05	SENSU 2	UW Diver Mini Array	5kHz	Mini	36	N	N	Y	
ACFM-UMWP005-40-50	SENSU 2	UW Weld	5kHz	Mini	15	Y	N	N	293A
ACFM-UMWP050-40-50	SENSU 2	UW HF Weld	50kHz	Mini	15	Y	N	n	558A
ACFM-UMWP005-21-05	SENSU 2	UW Weld	5kHz	Mini	15	N	N	Y	293
ACFM-UMWP050-21-05	SENSU 2	UW HF Weld	50kHz	Mini	15	N	N	Y	558
ACFM-UMGW005-40-XX	SENSU 2	UW Ground Weld	5kHz	Mini	15	Y	N	N	303
ACFM-UMGW005-21-XX	SENSU 2	UW Ground Weld	5kHz	Mini	15	N	N	Y	303
ACFM-UMTA005-40-50	SENSU 2	UW Tight Access	5kHz	Mini	15	Y	N	N	307A
ACFM-UMTA050-40-50	SENSU 2	UW HF Tight Access	50kHz	Mini	15	Y	N	N	312A
ACFM-UMTA005-21-05	SENSU 2	UW Tight Access	5kHz	Mini	15	N	N	Y	307
ACFM-UMTA050-21-05	SENSU 2	UW HF Tight Access	50kHz	Mini	15	N	N	Y	312
ACFM-UMRA005-40-50	SENSU 2	UW Right-Angled Mini Pencil	5kHz	Mini - RA	15	Y	N	N	337A
ACFM-UMST005-40-50	SENSU 2	UW Straight Mini Pencil	5kHz	Mini - Straight	15	Y	N	N	336A
ACFM-UMTR005-40-50	SENSU 2	UW Transverse Mini Pencil	5kHz	Mini - Transverse	15	Y	N	N	352A
ACFM-UMRA050-40-50	SENSU 2	UW HF Right-Angled Mini Pencil	50kHz	Mini - RA	15	Y	N	N	
ACFM-UMST050-40-50	SENSU 2	UW HF Straight Mini Pencil	50kHz	Mini - Straight	15	Y	N	N	307A
ACFM-UMTR050-40-50	SENSU 2	UW HF Transverse Mini Pencil	50kHz	Mini - Transverse	15	Y	N	N	
ACFM-UMRA005-21-05	SENSU 2	UW Right-Angled Mini Pencil, U41, 5m	5kHz	Mini - RA	15	N	N	Y	337
ACFM-UMST005-21-05	SENSU 2	UW Straight Mini Pencil, U41, 5m	5kHz	Mini - Straight	15	N	N	Y	336
ACFM-UMTR005-21-05	SENSU 2	UW Transverse Mini Pencil, U41, 5m	5kHz	Mini - Transverse	15	N	N	Y	352

PART NUMBER	RANGE	DESCRIPTION	FREQ	NOSE CONFIG	COVERAGE	AMIGO2	PACE	U41	LEGACY
ACFM-UMRA050-21-05	SENSU 2	UW HF Right-Angled Mini Pencil, U41, 5m	50kHz	Mini - RA	15	N	N	Y	
ACFM-UMST050-21-05	SENSU 2	UW HF Straight Mini Pencil, U41, 5m	50kHz	Mini - Straight	15	N	N	Y	307
ACFM-UMTR050-21-05	SENSU 2	UW HF Transverse Mini Pencil, U41, 5m	50kHz	Mini - Transverse	15	N	N	Y	
ACFM-UURA005-40-50	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	5kHz	Micro - RA	10	Y	N	N	354
ACFM-UUST005-40-50	SENSU 2	UW Straight Micro Nosed Pencil probe	5kHz	Micro - Straight	10	Y	N	N	353
ACFM-UUTR005-40-50	SENSU 2	UW Transverse Micro Nosed Pencil probe	5kHz	Micro - Transverse	10	Y	N	N	355
ACFM-UURA050-40-50	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	50kHz	Micro - RA	10	Y	N	N	
ACFM-UUST050-40-50	SENSU 2	UW Straight Micro Nosed Pencil probe	50kHz	Micro - Straight	10	Y	N	N	
ACFM-UUTR050-40-50	SENSU 2	UW Transverse Micro Nosed Pencil probe	50kHz	Micro - Transverse	10	Y	N	N	
ACFM-UURA005-21-05	SENSU 2	UW Right-Angled Micro Nosed Pencil probe	5kHz	Micro - RA	10	N	N	Y	354A
ACFM-UUST005-21-05	SENSU 2	UW Straight Micro Nosed Pencil probe	5kHz	Micro - Straight	10	N	N	Y	353A
ACFM-UUTR005-21-05	SENSU 2	UW Transverse Micro Nosed Pencil probe	5kHz	Micro - Transverse	10	N	N	Y	355A
ACFM-UURA050-21-05	SENSU 2	UW HF Right-Angled Micro Nosed Pencil probe	50kHz	Micro - RA	10	N	N	Y	
ACFM-UUST050-21-05	SENSU 2	UW HF Straight Micro Nosed Pencil probe	50kHz	Micro - Straight	10	N	N	Y	
ACFM-UUTR050-21-05	SENSU 2	UW HF Transverse Micro Nosed Pencil probe	50kHz	Micro - Transverse	10	N	N	Y	

The information in this document is accurate as of its publication. Actual products may differ from those presented herein. © 2020 Eddyfi UK Ltd. Eddyfi, TSC, Amigo2, PACE, U41, ACFM and their associated logos are trademarks or registered trademarks of Eddyfi in the United States and/or other countries. Eddyfi reserves itself the right to change product offerings and specifications without notice.

[www.eddyfitechnologies.com](http://www.eddyfitechnologies.com)

[info@eddyfi.com](mailto:info@eddyfi.com)

