On**Demand** Specialty System



Key Specifications

Depth Rating: 60m / 200ft Maximum Tether Length: 2,130m / 7,000ft Maximum Speed: 9m / 30ft per minute Vehicle Payload: up to 180kg / 400lb Front Facing Camera: Spectrum 90[™] Optional: Spectrum 120HD[™] high definition main camera, middle and/or rear Crystal Cam[®] Operating Temperature: 0°-40° C / 32°-104° F Vehicle Weight: 104kg / 230lb Vehicle Dimensions: 1651x371x434mm / 65x14.6x17.1in

Standard Components: 4 x 7000 series Minitracs[™], 1 x Spectrum 90[™] camera, 2 x 901 lights, parallel chassis and wiring harness, 2,130m / 7,000ft tether, AC winch, Versatrax[™] power supply / controller in a Pelican[®] case with Digital Video Recorder and sunlight readable monitor.

Versatrax 300TM (VT300)



Industries & Applications

- Military/Security
- Mining
- Municipal (Sewer/Water)
- Oil & Gas (Onshore/Offshore)
- Petrochemical

The Versatrax 300[™] is the solution to long range pipe inspection challenges. Able to inspect more than two kilometres of pipe in a single run, the VT300 includes up to three onboard video cameras, multiple sensor options, and is operable in pipe as small as 300mm / 12in internal diameter.

Versatile and customizable, the Versatrax 300[™] can deploy sensors and tooling in even the most remote and unaccommodating environments and locations. All units are configurable for round pipe or flat surface operation, and adjustable for a range of diameters.

Whatever your remote testing, assessment or construction needs — from video and sonar, to lasers and multi-sensor inspection — the VT300 delivers, with ultra long-range capability, extra payload capacity and friendly, intuitive control systems.



"Inuktun brings a concept to life with flexibility, innovation and ingenuity."

– Robert de Haas, Versatrax 300™ operator, Pacific Gas and Electric Company

ondemand@inuktun.com

1.877.INUKTUN | 1.877.468.5886

STANDARD IM3 OPTIONS

Custom configurations: See dealer for details



Crystal Cam® Middle or rear-facing

camera for comprehensive remote inspection




Spectrum 120[™] Enhanced zoom capability up to 432x

Spectrum 120HD™ High definition 1080p video quality for more detailed inspection



Tooling Integration Combine tooling requirements for remote handling and retrieval operations.


Versatrax 300™

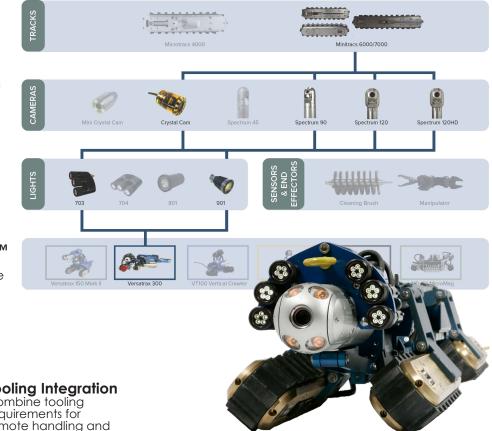


Versatrax 300[™] Standard Dimensions



Sensor Integration Easy integration such as sonar, NDT sensors, lasers and chemical sensors.





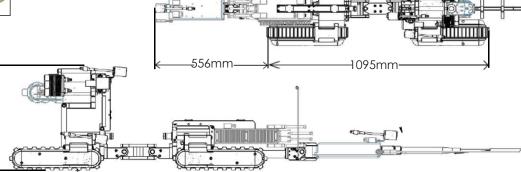

434mm